

Studies on the Effect of the Zinc Oxide Nano Additives along with Rice Bran Biodiesel Diesel Blends into CI Engine to reduce Pollution

¹Abhijeet Maurya[†], ¹Prof. Bhanu Pratap Singh, ²Dr. Ajay Kumar Sharma

¹Maharishi University of Information Technology, Lucknow, Uttar Pradesh, India

²Institute of Engineering and Technology, Lucknow, Uttar Pradesh, India

[†] Corresponding Author: abhijeetmaurya007@gmail.com

ABSTRACT

Pollution is a major problem for urban cities and its associated industries. The pollution caused by the industries is mainly because of burning of fossil fuels. Some of the pollutants can be controlled by the plantation but the oxides of nitrogen cannot be controlled only by planting trees. Some extra efforts are required to minimize pollution associated with the normal functioning of shop floor of the concerned industries but not affecting its performance. A fuel which suits best for the industrial use is the need of the hour. In this study, Zinc oxide nanoparticles are used as an additive to the rice bran blended biodiesel and analyze the combustion, performance and emission parameters in a the single-cylinder four-stroke engine water-cooled powered by diesel normally utilised in industries at a constant speed and compression ratio. The available fuel alternatives for testing consist of multiple combinations of diesel fuel and RB biodiesel, each with varying proportions. Furthermore, many gasoline mixes additionally have Zinc Oxide nanoparticles at a concentration of 30 parts per million (ppm). The findings suggest that the brake-specific fuel consumption of Rice bran biodiesel combined with Zinc oxide nano additive exhibits a consistent enhancement, but the brake thermal efficiency declines in comparison to diesel fuel. The concentrations of hydrocarbon (HC) and oxides of nitrogen (NOX) have been reduced, however there has been a little rise in carbon dioxide (CO₂) and carbon monoxide (CO). When rice bran biodiesel fuel combined with Zinc Oxide nano additive was used, an abnormally high exhaust gas temperature (EGT) was detected. According to this research, the addition of Zinc Oxide nano additive to rice bran biodiesel blends improves performance and decreases the noxious exhaust emissions generated by diesel engines.

Key Words	Rice bran, carbon mono oxide, Zinc oxide nano additive, biodiesel, exhaust emission, pollution
DOI	https://doi.org/10.46488/NEPT.2025.v24i02.B4225 (DOI will be active only after the final publication of the paper)
Citation of the Paper	Abhijeet Maurya, Prof. Bhanu Pratap Singh, Dr. Ajay Kumar Sharma, 2025. Studies on the Effect of the Zinc Oxide Nano Additives along with Rice Bran Biodiesel Diesel Blends into CI Engine to reduce Pollution. <i>Nature Environment and Pollution Technology</i> , 24(2), B4225. https://doi.org/10.46488/NEPT.2025.v24i02.B4225

INTRODUCTION

Rapidly increasing pollution in the urban cities of popular countries is harmful to human health. Most of the polluted content raised by diesel engine driven industries is inevitable, and reducing these toxic elements from the atmosphere becomes more or less impossible. The use of fossil fuels in industries is responsible for greenhouse gases and also affects human health directly. Due to the unexpected rise in harmful toxicities, numerous alternative fuels have been taken for compensation in place of diesel fuel taking into consideration of the accessibility, financial

and technical suitability. Thus, because it is possible to lower the maximum toxicity and increase the life of the engines in comparison to diesel fuel, biodiesel is an alternative energy source that is appropriate and sustainable enough to be used (Verma et al. 2021). Highest possible developing countries like India are producing biodiesels such as mahua oil, neem oil, rice bran oil, Pongamia oil, soyabean oil and jatropha oil etc from non-edible oils (Gerpen 2004). Rice bran biodiesel is mandatory because the large waste of rice bran is readily available in India.

Diesel engines that run on biodiesel may cut emissions the sulfur, hydrocarbon and carbon mono oxide exhaust emissions while increasing the NO_x because higher oxygen content is available in the biodiesel. The immense availability of oxygen is ascribed to complete combustion due to this the temperature increases in the chamber and it led to nitrogen oxide to accomplish these issues from biodiesel the zinc oxide nanoparticle is used as an additive because it has catalytic property and due to this property, it reduces the temperature during the combustion. On the other hand, biodiesel has a few advantages and disadvantages like higher viscosity, lower volatility and pour point. These disadvantages are ascribed to improper combustion (Sinha et al. 2008). (Sivakumar et al. 2018) Although biodiesel is prepared under an Indian version of the American Standard ASTM D-6751 and the European Standard EN-14214 has previously been developed by the Bureau of Indian Standards (BIS) in the form of a standard known as IS-15607 for bio-diesel (B 100). For motor petrol mixed with 5% ethanol and motor petrol blended with 10% ethanol, the Bureau of Indian Standards (BIS) has also released IS: 2796: 2008, which contains the specifications for both products.

The emission parameters of the diesel engine on neocloris methyl ester of algae oil along with ZnO in the concentration of 25, 50, 75 and 100 ppm and reported that BTE and HRR are enhanced and emission of CO and HC is reduced at 100 ppm ZnO nano additive (Kalaimurgan K. et al. 2021). (Deepak kumar et al. 2019) Outcomes of the study on the efficiency of the engine's performance, combustion parameters through the use of 80 ppm Zinc oxide with cottonseed oil biodiesel reported a better increment in performance and combustion characteristics along with a reduction in exhaust emission. (Nayak et al. 2021) conducted an experiment by using the WCO biodiesel (B20) along with 3gm of ZnO, GO and Al_2O_3 nano additives into fuel and compared the results with pure diesel. It was observed that the BTE has increased at higher load for fuels with ZnO and GO nano additives, while the BSFC has been enhanced for fuels with ZnO and Al_2O_3 at higher load. They reported about the exhaust emissions of carbon mono oxide, hydrogen carbon and nitrogen oxide are lowered in comparison to diesel fuel however smoke emissions are found higher for all blended fuel at full load. (Gavhane et al. 2020) Performed the findings after using the soyabean biodiesel (B25) and 25, 50 and 75 ppm ZnO nanoparticles with surfactant at many variations of loads (0% to 100%) and compression ratio (18.5 to 21.5 mm). They found an increment in BSFC and BTE and decreasing exhaust emissions like carbon mono oxide, carbon di oxide, and hydrogen carbon and nitrogen oxide at 21.5 mm compression ratio for 50 ppm ZnO nanoparticles added fuel. They analyzed also the HRR and MGT is increased and the reduction in ignition delay at the same blended fuel and engine operating conditions (Rajak et al. 2022). Conducted a comparative examination of the outcomes obtained from numerical and experimental

investigations. The researchers introduced ZnO nanoparticles into diesel fuel at concentrations of 250, 500, and 1000 parts per million (ppm). The addition was carried out at different rotational speeds ranging from 2000 to 3000 revolutions per minute (RPM), fuel injection timings (FITs) between 19.50 and 24.50, and compression ratios ranging from 15.5 to 16.5 millimetres (mm). They found the increment in BTE and marginal improvement in BSFC after numerical analysis as compared to experimental data. However, the BSFC is found lower in the numerical analysis as compared to experimental data between 2750 to 3000 rpm speed. They mentioned reduction in PMM at all compression ratios and till 2500 rpm speed and diminishment are found in smoke and There are no emissions whatsoever at any compression ratio. However, the emissions are larger when using gasoline combined with 500 ppm ZnO. They also saw an increase in EGT across all operating speeds and FITs (Praveena et al. 2020). Studied the impact of grapeseed oil with 50 ppm and 100 ppm ZnO and CeO₂ nanoparticles with 1% span 80% surfactant using the nano-emulsion process. According to their findings, the BTE and HRR values of 100 ppm ZnO and CeO₂ nanoparticles combined with grapeseed oil biodiesel fuel were much higher than those of GSBD. The study observed a decrease in the levels of NO_x, HC, and CO when using fuel blended with 100 ppm ZnO nanoparticles. The study conducted by (Khond et al. 2021) compare the results of the 200 ppm of Fe₂O₃, ZnO and SiO₂ nanoparticles along with neem biodiesel (B25). They used diesel expert software to find the relation between the performance of the engine (BSFC and BTE) and also the relation between exhaust emissions (CO, NO_x and Smoke) in their study. They found reduction in BSFC for Al₂O₃ and ZnO blended fuel while the BSFC is improved for SiO₂ and B25 blended fuel. When they checked for the result of BTE, they found an enhancement in BTE and maximum efficiency found for ZnO blended fuel as compared to B25, Al₂O₃ and SiO₂ blended fuel. They reported that the pollutant of NO_x increases for all blended fuel as well as CO₂ is enhanced from ZnO blended fuel only. However, CO and CO₂ are decreased from Al₂O₃ and SiO₂ blended fuels.

(Fayad et al. 2021) investigated the Al₂O₃ nanoparticles with butanol- diesel (B20) blended fuel in the concentration of 30, 50 and 100 ppm nanoparticles. The result reported HRR and increase in cylinder pressure. They mentioned also the result of the performance such as BSFC was reduced and BTE was enhanced. The emission parameters such as HC, CO and NO_x had been reduced for B20. They mentioned that the combustion is better for the butanol- diesel (B20) Al₂O₃ blended fuel. (Yadav et al. 2022) investigated diesel engines using SSCR technology have met EURO-VI emission criteria rapidly. Uniform ammonia stream homogeneity improves droplet generation and evaporation across the SCR catalyst. A appropriate mixer may improve ammonia flow. In SCR systems, line mixers, swirl mixers, and combinations of both are common. However, line and swirl mixers perform best for SCR efficiency. This article discusses many ammonia flow uniformity methods. Due to reduced droplet residence time, a line-swirl mixer combination converts urea optimally. These mixers provide consistent flow and temperature. Uniform temperature distribution improves catalyst performance and reduces deposits. The study gives enough data for diesel engine NO_x reduction researchers. A good mixer will reduce ammonia slip, helping diesel engine makers meet strict emission standards. (Chethan. et al. 2023) ASFAME synthesis is studied utilising Azadirachta Indica and Simarouba glauca oil blends with GO-CaO, a heterogeneous catalyst

produced from discarded eggshells. Optimising ASFAME production with varying catalyst concentrations provided 94.69% biodiesel from 0.5 g of GO-CaO. Additionally, the physicochemical properties of ASFAME were compared to conventional diesel, resulting in high-quality biodiesel meeting ASTM Standards 6751D. This work utilises the eco-friendly heterogeneous catalyst GO-CaO to fulfil fuel demand and enable its recovery and reuse. This article enables small-scale biodiesel makers to get affordable catalysts and use leftover wastes for catalyst production. This project aims to reduce disposal issues and promote sustainability by combining various biodiesel oils.

2. Preparation of rice bran biodiesel

(Srivastava et al. 2000) After analyzing the literature review different types of physical and chemical properties have been met such as the chemical properties of rice bran oil FA like Oleic (18:1) is 43.1 %, Arachidic C20:0 is 0.7%, linoleic (18:1) is 32.2%, linolenic (18:3) is 0.6% and FFA is 2.8%. Most of the physical properties have been tested in the fuel laboratory. Due to these properties firstly choose the 0.5% (W/W_{oil}) alcohol whose molar ratio is 6:1. Two types of base catalysts such as NaOH and KOH are selected and after splitting the glycerol, water washing is applied to remove the impurities from the biodiesel. 1 Ltr of hot distilled water (70°C) was used for the catalyst removal and settled up to the furnace under gravity. Through the application of these processes, two distinct layers were discovered. The lower layer reveals the presence of water and impurities, while the second layer signifies the presence of biodiesel. The pH of distilled water suggests that biodiesel does not contain any catalysts.

3. Preparation of Nano fuel blend

The Zinc Oxide nanoparticles with a size of 40 nm are manufactured by Ad-nano Pvt. Ltd. Karnataka, India. Figure 1 and Figure 2 show the SEM and EDX pictures, respectively. Table 1 presents the parameters of ZnO nanoparticles. The process of blending diesel with biodiesel involves using a magnetic stirrer set at a speed of 1500 revolutions per minute (RPM) for a duration of 20 minutes. The ultrasonicator (24kHz) was used for a duration of 30 minutes to disperse nanoparticles at a concentration of 30 parts per million (ppm) into the biodiesel mixed fuel. The prepared samples of fuel are stable after using the ultrasonication process. The properties of nano additive blended fuels are shown in *Table 2* which is tested according to the ASTM standards. The fuel properties as in *Table 2* measured by a hydrometer, bomb calorimeter, Viscometer and Cleveland open-cup apparatus.

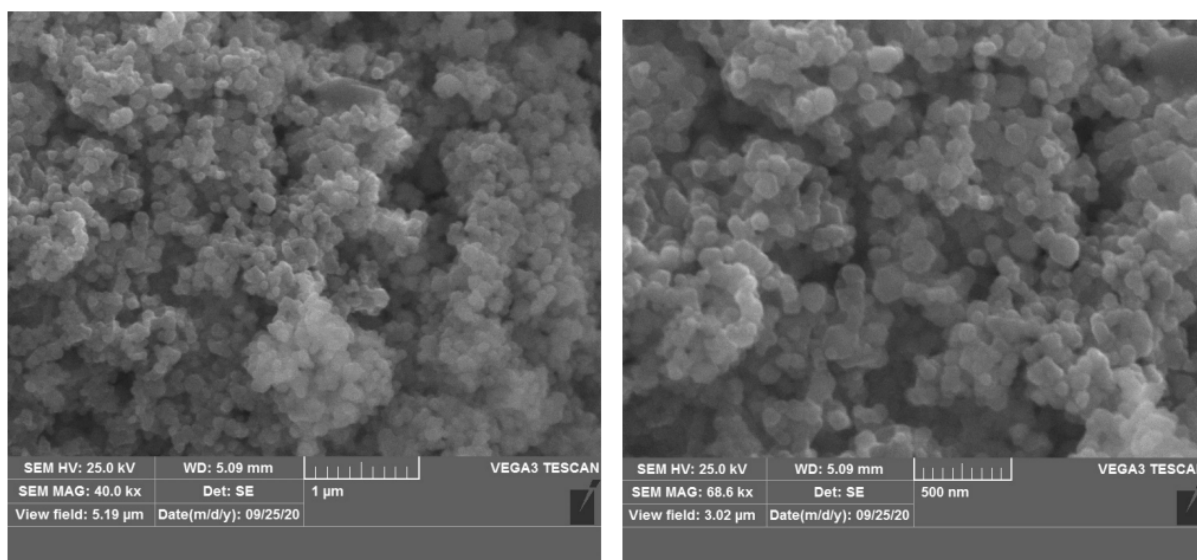


Fig. 1 SEM images of 40 nm ZnO nanoparticles.

Zinc oxide nanoparticles exhibited smooth and homogeneous shapes, including spherical-like structures, cube-like structures, and layer-like structures. Furthermore, there was no agglomeration identified, which indicates that these nanoparticles are acceptable for treatment. Investigations using energy dispersive X-rays on the nanoparticles of zinc oxide provide evidence that the samples are free of impurities. The ultra purity of the zinc oxide nanoparticles that were produced was quite high as shown in figure 1.

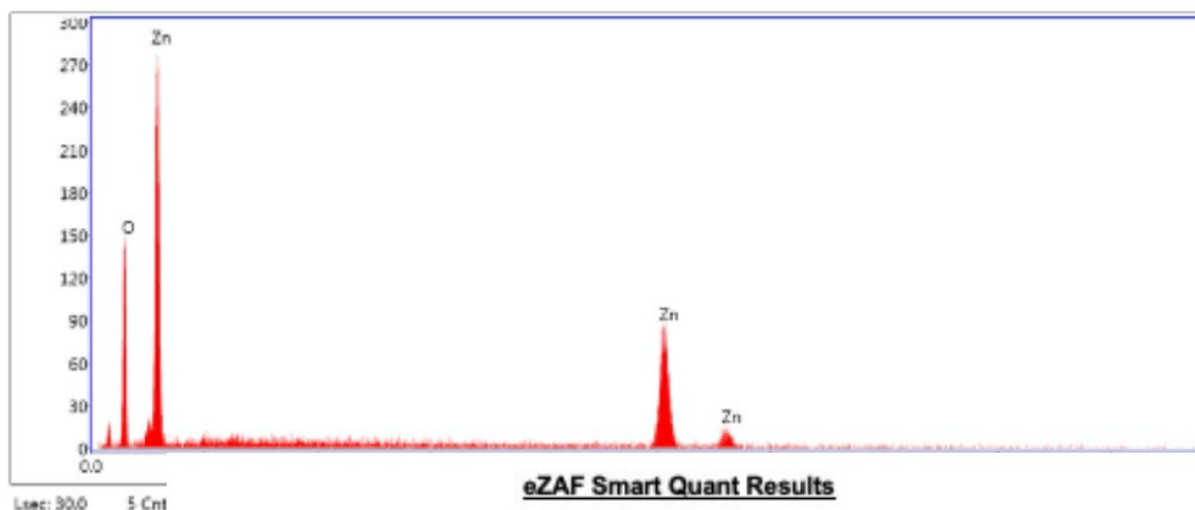


Fig. 2 EDX graph for the ZnO nanoparticles.

Figure 2 displays the elemental composition analyses of the ZNPs that were derived from the EDX plot of the SEM images. A high level of purity was validated for the ZNPs that were synthesised, as shown by the EDX spectra, which demonstrated that the samples contain the requisite phase of zinc and oxygen.

Table 1 Characteristics of Zinc oxide nanoparticles

Item	Value
Molecular Formula	ZnO
Purity	99.9%
Particle Size	10-40 nm
Molecular Weight	81.408 g/mol
Bulk density	0.58gm/cm ³
SSA	100-120 m ² /g
Manufacturer	Ad-nano Technologies Pvt. Ltd.

Table 2 Characteristics of all fuel samples.

Properties/fuel	D100 (Neat)	B10	B20	B30	B10ZnO30	B20ZnO30	B30ZnO30	Standard
Density, Kg/m³, 15⁰C	837	839	847	852	839.2	848	854	ASTM D-1298
Heating Value (MJ/Kg)	44.0	43.6	42.90	40.05	44.01	46.23	46.54	ASTM D240
Kinematic Viscosity, 40⁰C	3.8	4.1	4.32	4.9	4.0	4.14	4.5	ASTM 7042
Flashpoint (⁰C)	74	185	188	76	83	85	86	ASTM D-93

4. Experimental setup

This experimentation involves the use of a single-cylinder four-stroke agricultural diesel engine manufactured in Bharat. The engine operates at a consistent speed and compression ratio. The dynamometer is utilised for load and speed control, while the thermocouple heating filament (ranging from 0 kW to 3.5 kW) is employed to calculate data at different loads. There are five different types of temperature sensors, labelled T1 to T5, that are utilised for measuring various temperatures. These include the water inlet temperature, water outlet temperature to the engine, water outlet temperature to the calorimeter, exhaust gas temperature, and ambient temperature. The Airvisor 4 gas analyzer is utilised for measuring the emissions of CO, CO₂, HC, and NO_x.



Fig. 3 Experimental Diesel engine image

Table 3 Key specifications of the diesel engine.

Item	Value
Engine manufacturer	Bharat
Rated power	3.5 kW
Engine Capacity	8 HP
Cooling Method	Water-Cooled
Injection Method	Direct Injection
Bore × Stroke	(87.5 × 110) mm.
Compression Ratio	17.5:1 mm
Speed	1500 RPM
Number of cylinders	1

5. Uncertainty analysis

Uncertainty analysis is important for finding out the exact value after experimentation. Various types of uncertainty (inaccuracies) such as weighting of nanoparticles, engine or test fuel components, some environmental effects and calculation errors by human were found during the research work. The accuracies and inaccuracies are displayed in Table 4.

Table 4 Exploring the analysis of uncertainty

Parameters	Accuracy	Uncertainty (%)
------------	----------	-----------------

Electronic balance (ppm)	-	± 0.007
Heat release rate (J/sec)	-	± 0.22
BTE	-	± 0.25
BSFC	-	± 0.30
CO	± 0.001	± 0.16
CO ₂	± 10 ppm	± 0.002
HC	± 10 ppm	± 0.001
NO _x	± 10 ppm	± 0.002

6. Results and Discussion

Within this industry, we analyse the performance results such as BSFC and BTE of diesel, as well as combustion parameters like EGT and emissions including CO, CO₂, HC, and NO_x. These are compared to the neat diesel fuel (D100). All these effects are measured under consistent conditions, including a constant speed and compression ratio of the diesel engine, at four different loads: 0 kW, 1.5 kW, 2.5 kW, and 3.5 kW.

6.1 Effect of all fuel samples on performance of the engine

6.1.1 Effect on BSFC of nano additive mixed fuel

The BSFC is the major parameter of engine performance. The results of the BSFC are shown in *Figure 4*. The results show an increase in BSFC for all fuel blends, except for B30 and B10 at 1.5 kW and 3.5 kW loads, respectively. The fuel consumption reached its highest levels at 29.86%, 50.04%, and 40% for the B20ZnO30 fuel blend when operating at 1.5 kW, 2.5 kW, and 3.5 kW loads respectively, in comparison to neat diesel (D100). The improvements were demonstrated due to the utilisation of Zinc Oxide nanoparticles, which contribute to enhanced oxidation. The addition of zinc oxide nanoparticles to a fuel significantly improves the combustion response in the combustion chamber. This is due to the superior volume to surface area ratio and high thermal efficiency of the nanoparticles, which increase the accessible volume for burning. Using the Zinc Oxide nano additive in the fuel blends improves the air-fuel ratio and decreases the ignition delay period. In addition, it enhances the flash point of the fuel blends, resulting in improved combustion.

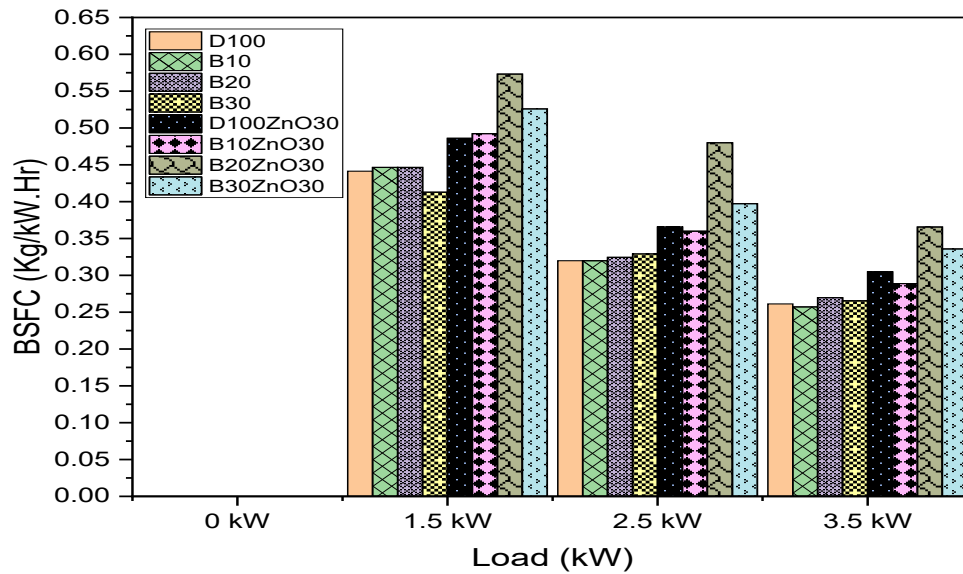


Fig. 4 Graph for Load vs BSFC.

6.1.2 Effect of nano additive blended fuel on BTE

The BTE increases when the loads will increase. It depends on the dosages level of nanoparticles if the dosage of nanoparticles improves then BTE will increase. The addition of ZnO nanoparticles lowers the ignition delay and evaporation time. The addition of nano additive improves the fuel burning properties and air-fuel ratio of fuel. This causes fuel droplets is increases due to these droplets fuel evaporates rapidly. This process affects thermal efficiency. At a 1.5 kW load, the use of B30 fuel resulted in a 6.79% increase in BTE compared to neat diesel fuel.

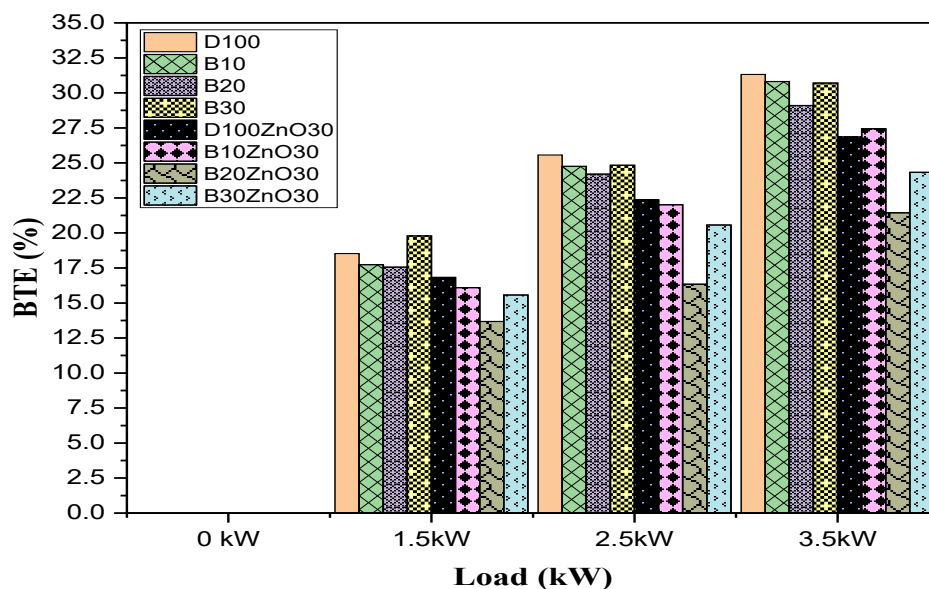


Fig. 5 Graph for Load vs BTE.

6.2 The Impact of Nano Additive Mixtures on Engine Combustion

6.2.1 Examining the impact of nano additive blended fuel on EGT

Increasing the temperature in the combustion chamber improves the exhaust gas temperature (EGT). In this experimental study, temperature of exhaust gas is higher for some blended fuels. The maximum EGT values for different fuel blends were recorded at various load levels. B30, B30ZnO30, B30ZnO30, and B20ZnO30 fuel blends exhibited EGT values of 16.18%, 5.80%, 6.62%, and 9.59% respectively, compared to neat diesel fuel (D100). The presence of ZnO in the fuel blends acted as a catalyst, controlling the temperature rise in the cylinder. Additionally, the high pressure inside the cylinder contributed to the increase in temperature. The temperatures of exhaust gas for D100ZnO30 fuel blends are identical to those of neat diesel fuel (D100) across all loads.

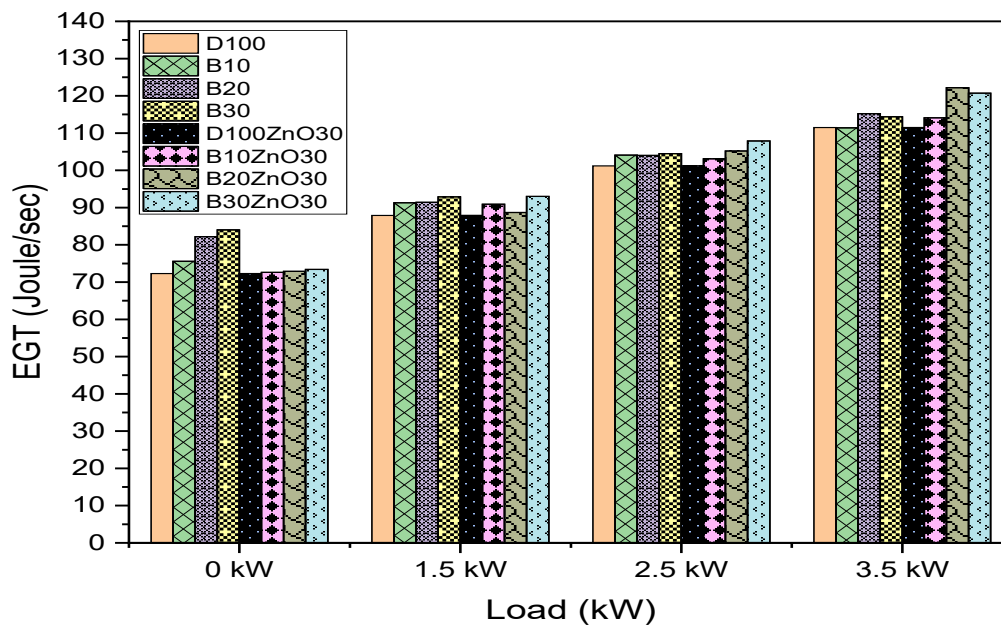


Fig. 6 Graph for Load vs EGT.

6.3 The Impact of Using Nano Additives on Exhaust Emissions from the Engine

6.3.1 The nano additive mixed fuel's impact on CO exhaust

Carbon monoxide is generated as a result of an increase in the temperature of the combustion chamber. A fuel's combustion response in the combustion chamber is considerably improved when zinc oxide nanoparticles are added to the fuel via the addition process. This occurs as a result of the nanoparticles' high thermal efficiency and higher volume to surface area ratio, both of which contribute to an increase in the volume that is potentially available for combustion. As a result of excessive oxygen and the higher reactive surface of ZnO, which improves the temperature, as well as pressure due to the higher heating value of fuel, which results in complete combustion, and due to the higher oxygen content, it converts the CO into CO₂, the maximum decrement in CO content for the D100ZnO30 fuel blend was found to be 80% at 0 kW load in this experimental study. This was found to be the case when compared to neat diesel (D100). The carbon monoxide (CO) levels for various fuel blends, including B10,

B20, B30, D100ZnO30, B10ZnO30, and B30ZnO30, at 1.5 kW, as well as B10 and B10ZnO30 at 2.5 kW, are equivalent to that of pure diesel (D100) fuel.

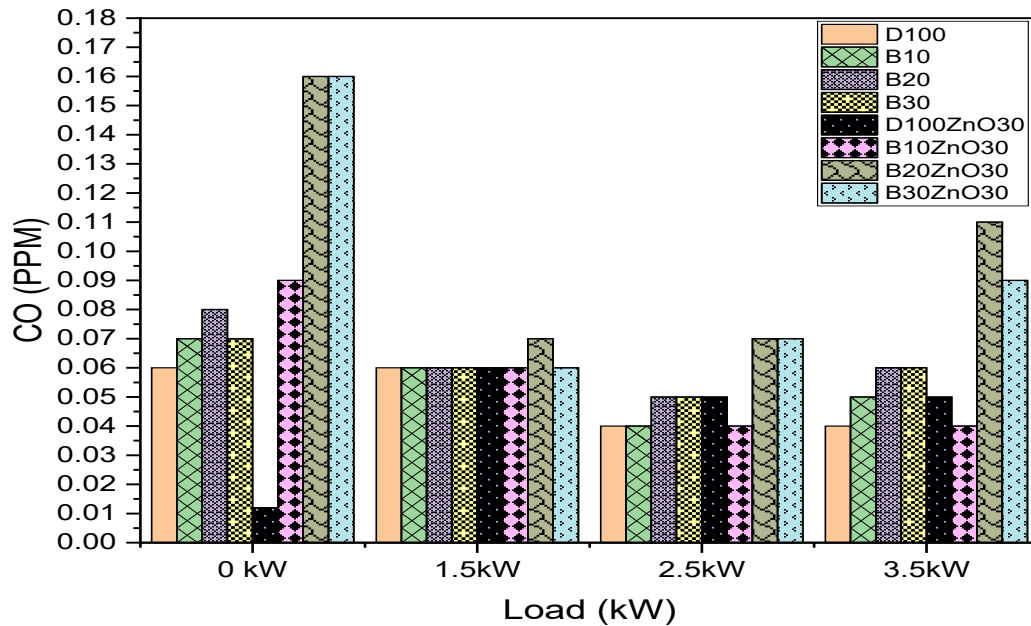


Fig. 7 Graph for Load vs CO.

6.3.2 The impact of incorporating nano additives into gasoline on the release of CO₂ emissions

CO₂ is produced due to the higher oxidation of fuel during combustion. In this experiment maximum diminishment in CO₂ is obtained from B10, B20, B30 and B10ZnO30 fuel blends that are 3.4%, 3.1% 3.6% and 3.7% respectively at 0 kW load and CO₂ decreases 2.94% for B10 fuel blend at 1.5 kW as compared to D100 due to better atomization of fuel. At a 2.5 kW load, the CO₂ value for B10 fuel blends is equivalent to that of neat diesel fuel in the experiment.

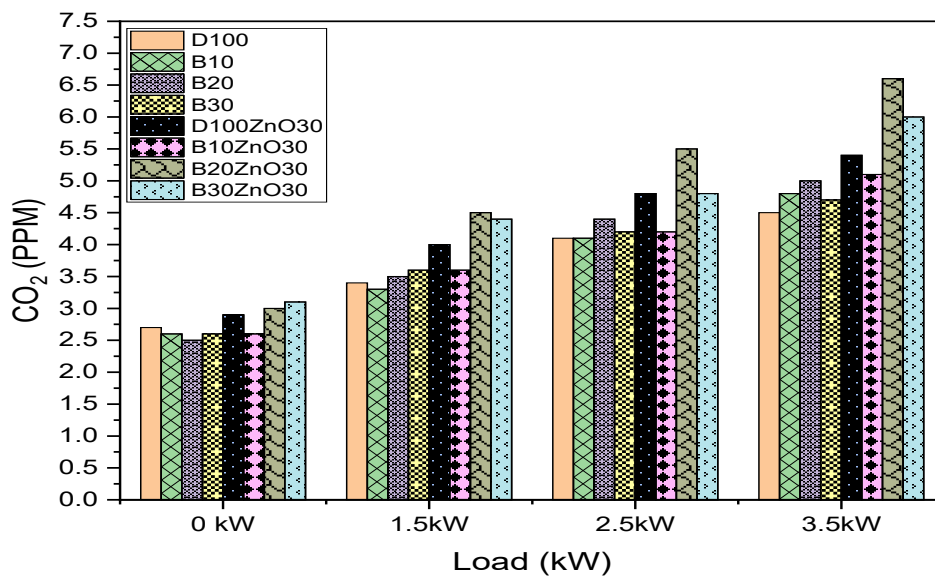


Fig. 8 Graph for Load vs CO₂.

6.3.3 Effect of the nano additive blended fuel on HC exhaust emission

Because of the viscosity of the fuel's combination with air and the spraying of fuel within the combustion chamber, the hydrocarbon (HC) emission is mostly determined by these two factors. It involved determining the ratio of air to fuel, ranging from a lean mixture to a rich mixture. Certain fuel blends have demonstrated a decrease in HC emissions under various load conditions. At 0 kW, 1.5 kW, and 2.5 kW loads, B10ZnO30, D100ZnO30, and D100ZnO30 showed significant reductions in HC levels when compared to neat diesel fuel (D100). The reason for the above phenomena is the addition of nano additives in the blended fuel, which effectively eliminated unwanted fuel and provided an excess of oxygen. Therefore, nanoparticles are commonly referred to as oxygen buffers that aid in enhancing the air-fuel equivalence ratio. When operating at a 3.5 kW load, the HC emission levels are higher for all blended fuels compared to neat diesel fuel (D100). This is primarily due to the higher viscosity characteristics of the blended fuels, which leads to difficulties in fuel spraying and ultimately results in poor combustion.

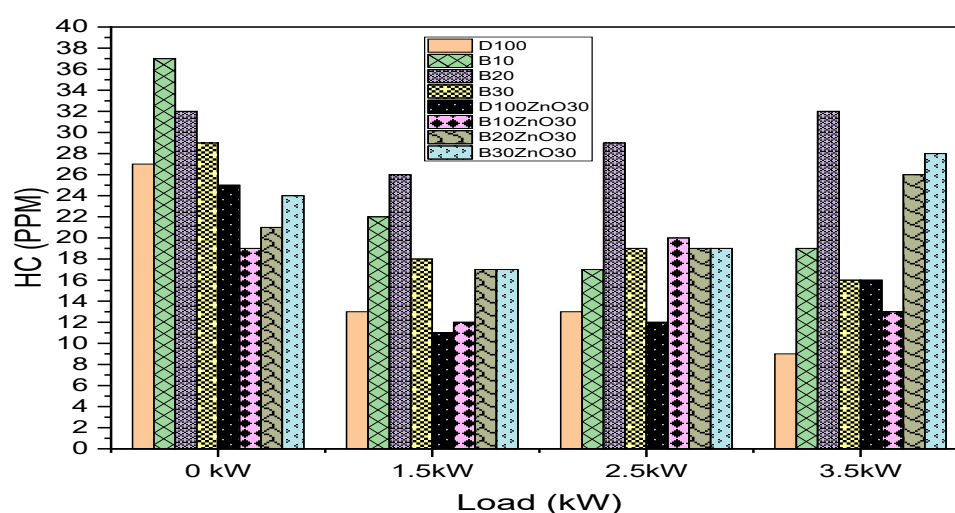


Fig. 9 Graph for Loads vs Hydrocarbon (HC).

6.3.4 Effect of the nano additive blended fuel on NO_x exhaust emission

The emission of NO_x is influenced by the elevated temperature and pressure within the cylinder. It is directly related to the engine's loads. As the engine load increases, the NO_x levels will also rise. Figure 9 illustrates the decrease in NO_x emissions when using all-fuel blends compared to neat diesel fuel (D100). The fuel blends B30ZnO30, B10ZnO30, B30ZnO30, and B10ZnO30 showed significant reductions of 21.78%, 17.22%, 11.30%, and 10.97% respectively at different power levels. The reason for the thermal stability of ZnO nanoparticles and their ability to promote shorter ignition delay, resulting in improved air-fuel mixing. Through their catalytic properties, Zinc Oxide nanoparticles have the ability to absorb oxygen content, resulting in a reduction in NO_x exhaust emissions.

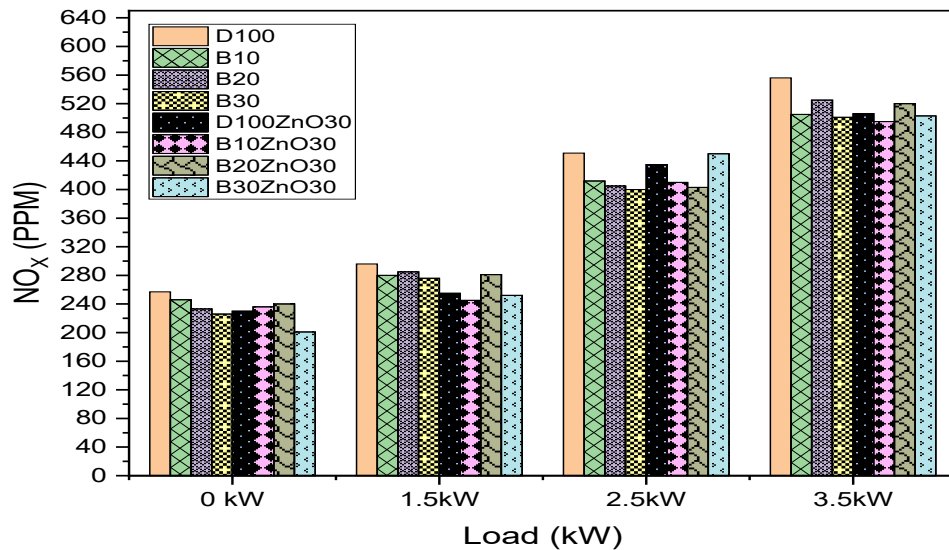


Fig. 10 Graph for Load vs NO_x.

7. Conclusion

This research examined the impact of adding a ZnO additive to biodiesel and diesel fuel blends on the performance, combustion, and exhaust emissions of a diesel engine. The data are presented in a columnized format below, comparing them to plain diesel.

- The BSFC is 29.86%, 50.04% and 40% improved for the B20ZnO30 fuel at various loads due to the characteristics of the biodiesel.
- The Brake thermal efficiency value should be enhanced by increasing the concentrations of nano additives in fuel. The maximum 6.79% improvement is recorded on B30 fuel at 1.5 kW load.
- The EGT shows a significant improvement of 16.18% thanks to the catalytic properties of ZnO and its large surface area.
- The highest reduction in carbon monoxide (CO) emissions for B20 fuel is 7.69% when the load is 0 kW, while the value of CO emission for B10 fuel is the same as that of plain diesel fuel when the load is 2.5 kW. This leads to an improvement in CO₂ levels as well. Plantations of trees can help control emissions, but they are unable to control NO_x, which directly harms the ozone (O₃).
- The maximum reduction in HC is 29.2% and 15.38% for B10ZnO30 and D100ZnO30. Because nanoparticles are the oxidation catalyst that improves the combustion property and leads to shorter ignition delay.
- Very good results were found for NO_x emission. The NO_x emission slightly decreases for the all-fuel blends at all loads. The better results of reduction in NO_x emission are 21.78% and 17.22% found for B30ZnO30 and B10ZnO30 fuel blends respectively. Because of the excessive content in biodiesel, mixing the catalytic-based ZnO nanoparticles enhances the cylinder temperature. Nitrogen is converted into nitric acid which causes to decrease in NO_x content from the exhaust.

Thus, it has been summarized that Zinc Oxide nanoparticles are better additive, enhancing performance and reducing exhaust emissions. Zinc Oxide nanoparticles are efficient and improve the concentration for better combustion results for future recommendation. The above archived combination of biodiesel and nano particles seems to be solution for reducing industrial pollution and to reduce the related health hazards for its workers.

Abbreviations

RB	Rice bran	SEM	Scanning Electron Microscope
WCO	Waste cooking oil	EDX	Energy dispersive X-ray Spectroscopy
PMM	Particulate matter	MGT	Mean gas temperature
GO	Graphene Oxide	FA	Fatty acid
EGT	Exhaust gas temperature	HRR	Heat release rate
FFA	Free fatty acid		
GSBD	Grapeseed oil biodiesel		
FITs	Fuel injection timings		

REFERENCES

- [1] T.N. Verma, P. Shrivastava, U. Rajak, G. Dwivedi, S. Jain, A. Zare, A.K. Shukla, P. Verma (2021), A comprehensive review of the influence of physicochemical properties of biodiesel on combustion characteristics, engine performance and emissions, *Journal of Traffic and Transportation Engineering (English Edition)*. 8 (2021) 510–533. <https://doi.org/10.1016/j.jtte.2021.04.006>
- [10] V. Praveena, M.L.J. Martin, V.E. Geo (2020), Experimental characterization of CI engine performance, combustion and emission parameters using various metal oxide nanoemulsion of grapeseed oil methyl ester, *J Therm Anal Calorim*. 139 (2020) 3441–3456. <https://doi.org/10.1007/s10973-019-08722-7>.
- [11] V.W. Khond, K. Rambhad, V. Shahadani (2021), New diesel-neem biodiesel blend (D75NB25) containing nano iron oxide, silicon dioxide and zinc oxide for diesel engine: An experimental investigation, *Mater Today Proc*. 47 (2021) 2701–2708. <https://doi.org/10.1016/j.matpr.2021.03.004>.
- [12] V. Saxena, N. Kumar, V.K. Saxena (2017), A comprehensive review on combustion and stability aspects of metal nanoparticles and its additive effect on diesel and biodiesel fuelled C.I. engine, *Renewable and Sustainable Energy Reviews*. 70 (2017) 563–588. <https://doi.org/10.1016/j.rser.2016.11.067>.
- [13] M.A. Fayad, H.A. Dhahad (2021), Effects of adding aluminum oxide nanoparticles to butanol-diesel blends on performance, particulate matter, and emission characteristics of diesel engine, *Fuel*. 286 (2021). <https://doi.org/10.1016/j.fuel.2020.119363>.
- [14] A. Srivastava, R. Prasad (2000), Triglycerides-based diesel fuels, *Renewable and Sustainable Energy Reviews*. 4 (2000) 111–133. [https://doi.org/https://doi.org/10.1016/S1364-0321\(99\)00013-1](https://doi.org/https://doi.org/10.1016/S1364-0321(99)00013-1).
- [15] Yadav, M.K. and Srivastava, A.K., 2022. Effective Mixer Design an Important Factor In SSCR Systems for Reduction of NO_x from Exhaust of Diesel Engines. *Nature Environment and Pollution Technology*, 21(4), pp.1753-1760. [10.46488/NEPT.2022.v21i04.030](https://doi.org/10.46488/NEPT.2022.v21i04.030)
- [16] Chethan, S.G., Khan, M.M. and Sreepathi, L.K., 2023. An Approach for Biodiesel Production from Blends of *Azadirachta indica* and *Simarouba glauca* Triglycerides by Graphene-Doped Calcium Oxide Catalyst and Its Comparative Studies. *Nature Environment and Pollution Technology*, 22(3), pp.1607-1614. [10.46488/NEPT.2023.v22i03.047](https://doi.org/10.46488/NEPT.2023.v22i03.047)
- [2] J. van Gerpen (2004), Biodiesel processing and production, (n.d.). <https://doi.org/10.1016/j.fuproc.2004.11.005>.

- [3] S. Sinha, A.K. Agarwal, S. Garg(2008), Biodiesel development from rice bran oil: Transesterification process optimization and fuel characterization, *Energy Convers Manag.* 49 (2008) 1248–1257. <https://doi.org/10.1016/j.enconman.2007.08.010>.
- [4] M. Sivakumar, N. Shanmuga Sundaram, R. Ramesh kumar, M.H. Syed Thasthagir (2018), Effect of aluminium oxide nanoparticles blended pongamia methyl ester on performance, combustion and emission characteristics of diesel engine, *Renew Energy.* 116 (2018) 518–526. <https://doi.org/10.1016/J.RENENE.2017.10.002>.
- [5] K. Kalaimurugan, D. Somasundaram, C. Thirugnanam, T. Dharmaprabhakaran (2021), Combustion behaviour of ZnO nanoparticles added algae biodiesel on CI engine, *Mater Today Proc.* (2021). <https://doi.org/10.1016/j.matpr.2021.02.508>.
- [6] T. Deepak Kumar, S.S. Hussain, D.K. Ramesha (2019), Effect of a zinc oxide nanoparticle fuel additive on the performance and emission characteristics of a CI engine fuelled with cotton seed biodiesel blends, in: *Mater Today Proc*, Elsevier Ltd, 2019: pp. 2374–2378. <https://doi.org/10.1016/j.matpr.2020.02.509>.
- [7] V. Nayak, A.V. Karthik, B.K. Sreejith, B.G. Prasad, K.S. Kini (2021), Performance, combustion and emission characteristics of single cylinder CI engine with WCO biodiesel and nanoparticles, *Mater Today Proc.* (2021). <https://doi.org/10.1016/j.matpr.2021.11.249>.
- [8] R.S. Gavhane, A.M. Kate, A. Pawar, M.R. Safaei, M.E.M. Soudagar, M.M. Abbas, H.M. Ali, N.R. Banapurmath, M. Goodarzi, I.A. Badruddin, W. Ahmed, K. Shahapurkar (2020), Effect of zinc oxide nano-additives and soybean biodiesel at varying loads and compression ratios on vcr diesel engine characteristics, *Symmetry (Basel).* 12 (2020) 1–31. <https://doi.org/10.3390/sym12061042>.
- [9] U. Rajak, Ü. Ağbulut, I. Veza, A. Dasore, S. Sarıdemir, T.N. Verma (2022), Numerical and experimental investigation of CI engine behaviours supported by zinc oxide nanomaterial along with diesel fuel, *Energy.* 239 (2022). <https://doi.org/10.1016/j.energy.2021.122424>.